



QUADRALUMEN
LED by life


Product TDS

Model No.: QL4001BT

Description: QL LED T5 Batten

Trademark: Aarotino™

Product Dimensions

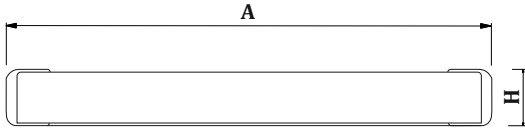

Product Image



System Wattage (Watts)	Input Voltage (AC)	Power Factor (PF)	THD	Driver Surge Protection	CCT Available	L (MM)	H (MM)	W (MM)
10w 20w	90-300	> 0.95	<15%	2.5Kv	3000k 4000k 5700k	600 1200	30 30	20 20

Lumen Output: 85-100 Lumens/Watt

LED Type	LED Make	Secondary Optics	CRI	Optics Efficacy	Main Housing	IP Protection-Complete Luminaire
Discrete	Everlight/Edison	Diffuser made in Polycarbonate	> 80	> 85-90	AL. Extrusion Main Housing	IP20

Mounting Type	Driver Provision	Powder Coating
Surface Type	Integrated in Housing	White



- BIS approved Drivers
- Under voltage protection, Over voltage protection
- Wide operating voltage range (90-300V AC)
- Over temperature protection
- Short circuit protection
- 2.5kV Surge Protection up to 48W | 4-10kV for 60W & above

Area of applications-

Home | Factories | Business Centres | Offices | School & College | Café & Restaurants | Shopping Arcades | Hotel & Resorts | Theatres | Retail Shops | Modern Retail | Hospitals