



QUADRALUMEN
LED by life


Product TDS

Model No.: QL6601EX

Description: QL LED Street Light – Red End Caps

Trademark: Canopus™

Product Dimensions

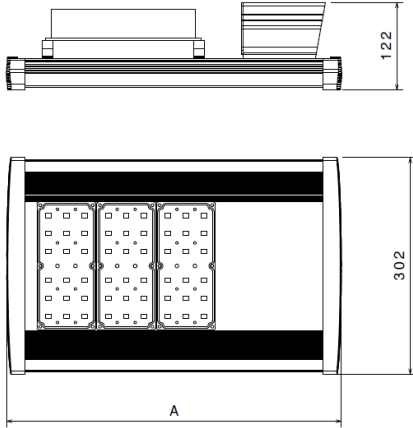

Product Image



System Wattage (Watts)	Input Voltage (AC)	Power Factor (PF)	THD	Driver Surge Protection	CCT Available	L=A (MM)	Height (MM)	Width (MM)
60w	120-270	> 0.95	<10%	7Kv	5700k	365	122	302
72w						365	122	302
90w						365	122	302
100w						365	122	302
120w						465	122	302
150w						465	122	302
180w						515	122	302
200w						515	122	302

Lumen Output: 95-110 Lumens/Watt

LED Type	LED Make	Secondary Optics	CRI	Optics Efficacy	Main Housing	IP Protection-Complete Luminaire
Discrete	CREE/Samsung	LED Composite PC Lenses	> 70	> 100	AL. Extrusion	IP66

Mounting Type	Driver Provision	Powder Coating	Highest voltage Sustainability
Pole mount Suitable for 60 mm OD Pipe provided	Fitted on top of main Housing	Black	440V for 4 Hrs



- BIS approved Drivers
- Under voltage protection, Over voltage protection
- Wide operating voltage range (90-300V AC)
- Over temperature protection
- Short circuit protection
- 2.5kV Surge Protection up to 48W | 4-10kV for 60W & above

Area of applications-

Arterial Roads | Main Road | Multi-level Junctions | Traffic Squares | Perimeter Lighting | Security Lighting