



QUADRALUMEN  
LED by life


# Product TDS

Model No.: QL2001SQ

Description: QL LED Deep-Drawn 2x2 - Backlit

Trademark: Antares™

## Product Dimensions

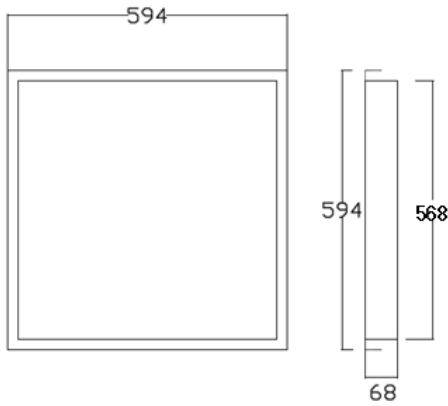

## Product Image



System Wattage (Watts)	Input Voltage (AC)	Power Factor (PF)	THD	Driver Surge Protection	CCT Available	Diameter (MM)	Depth (MM)
36w 45w	90-300	> 0.95	< 15%	2.5Kv	3000k   4000k   6500k	594x594 <u>Cut-out</u> 568x568	68

Lumen Output: 80-100 Lumens/Watt

LED Type	LED Make	Secondary Optics	CRI	Optics Efficacy	Main Housing	IP Protection-Complete Luminaire
Discrete	Everlight/Edison	Diffuser made in Polycarbonate	> 80	> 80-90	CRCA	IP20

Mounting Type	Driver Provision	Powder Coating
Recessed/Surface Type	Provided Externally	White



- BIS approved Drivers
- Under voltage protection, Over voltage protection
- Wide operating voltage range (90-300V AC)
- Over temperature protection
- Short circuit protection
- 2.5kV Surge Protection up to 48W | 4-10kV for 60W & above

### Area of applications-

Factories | Business Centres | Offices | School & College | Modern Retail | Hospitals