



QUADRALUMEN
LED by life


Product TDS

Model No.: QL6651PD

Description: QL LED Street Light - Modular

Trademark: Canopus™

Product Dimensions

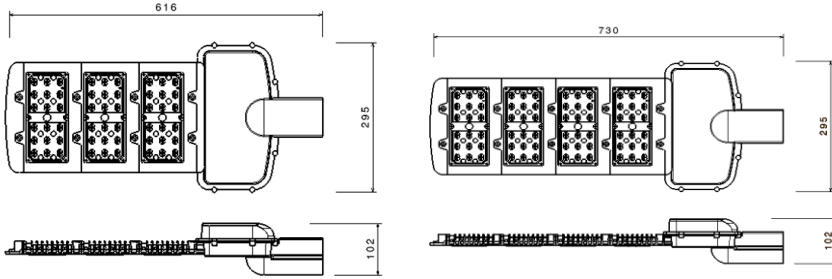

Product Image



System Wattage (Watts)	Input Voltage (AC)	Power Factor (PF)	THD	Driver Surge Protection	CCT Available	L (MM)	Height (MM)	Width (MM)
120w	120-270	> 0.95	<10%	7Kv	5700k	616	102	295
130w						616	102	295
150w						616	102	295
180w						730	102	295
210w						730	102	295

Lumen Output: 95-110 Lumens/Watt

LED Type	LED Make	Secondary Optics	CRI	Optics Efficacy	Main Housing	IP Protection-Complete Luminaire
Discrete	CREE/Samsung	LED Composite PC Lenses	> 70	> 100	AL. High Pressure Die Casting	IP66

Mounting Type	Driver Provision	Powder Coating	Highest voltage Sustainability
Integrated with CG Housing Suitable for 60 mm OD Pipe	Fitted Inside CG Housing	Black	440V for 4 Hrs



- BIS approved Drivers
- Under voltage protection, Over voltage protection
- Wide operating voltage range (90-300V AC)
- Over temperature protection
- Short circuit protection
- 2.5kV Surge Protection up to 48W | 4-10kV for 60W & above

Area of applications-

Arterial Roads | Main Road | Multi-level Junctions | Traffic Squares | Perimeter Lighting | Security Lighting